

BMP Inspection & Maintenance Forms

Table of Contents

Bioretention Inspection and Maintenance Agreement	Page 1
Dry Extended Detention Basin Inspection and Maintenance Agreement	Page 5
Filter Strip, Restored Riparian Buffer and Level Spreader I & M Agreement	Page 9
Permeable Pavement Inspection and Maintenance Agreement	Page 12
Sand Filter Inspection and Maintenance Agreement	Page 15
Stormwater Wetland Inspection and Maintenance Agreement	Page 18
Wet Detention Basin Inspection and Maintenance Agreement	Page 22

These forms are available on-line at: http://h2o.enr.state.nc.us/su/bmp_forms.htm

Permit Number: _____
 (to be provided by DWQ)

Drainage Area Number: _____

Bioretention Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

Important operation and maintenance procedures:

- Immediately after the bioretention cell is established, the plants will be watered twice weekly if needed until the plants become established (commonly six weeks).
- Snow, mulch or any other material will NEVER be piled on the surface of the bioretention cell.
- Heavy equipment will NEVER be driven over the bioretention cell.
- Special care will be taken to prevent sediment from entering the bioretention cell.
- Once a year, a soil test of the soil media will be conducted.

After the bioretention cell is established, I will inspect it **once a month and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problems:	How I will remediate the problem:
The entire BMP	Trash/debris is present.	Remove the trash/debris.
The perimeter of the bioretention cell	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
The inlet device: pipe, stone verge or swale	The pipe is clogged (if applicable).	Unclog the pipe. Dispose of the sediment off-site.
	The pipe is cracked or otherwise damaged (if applicable).	Replace the pipe.
	Erosion is occurring in the swale (if applicable).	Regrade the swale if necessary to smooth it over and provide erosion control devices such as reinforced turf matting or riprap to avoid future problems with erosion.
	Stone verge is clogged or covered in sediment (if applicable).	Remove sediment and clogged stone and replace with clean stone.

BMP element:	Potential problems:	How I will remediate the problem:
The pretreatment area	Flow is bypassing pretreatment area and/or gullies have formed.	Regrade if necessary to route all flow to the pretreatment area. Restabilize the area after grading.
	Sediment has accumulated to a depth greater than three inches.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and restabilize the pretreatment area.
	Erosion has occurred.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	Weeds are present.	Remove the weeds, preferably by hand.
The bioretention cell: vegetation	Best professional practices show that pruning is needed to maintain optimal plant health.	Prune according to best professional practices.
	Plants are dead, diseased or dying.	Determine the source of the problem: soils, hydrology, disease, etc. Remedy the problem and replace plants. Provide a one-time fertilizer application to establish the ground cover if a soil test indicates it is necessary.
	Tree stakes/wires are present six months after planting.	Remove tree stake/wires (which can kill the tree if not removed).
The bioretention cell: soils and mulch	Mulch is breaking down or has floated away.	Spot mulch if there are only random void areas. Replace whole mulch layer if necessary. Remove the remaining mulch and replace with triple shredded hard wood mulch at a maximum depth of three inches.
	Soils and/or mulch are clogged with sediment.	Determine the extent of the clogging - remove and replace either just the top layers or the entire media as needed. Dispose of the spoil in an appropriate off-site location. Use triple shredded hard wood mulch at a maximum depth of three inches. Search for the source of the sediment and remedy the problem if possible.
	An annual soil test shows that pH has dropped or heavy metals have accumulated in the soil media.	Dolomitic lime shall be applied as recommended per the soil test and toxic soils shall be removed, disposed of properly and replaced with new planting media.

BMP element:	Potential problems:	How I will remediate the problem:
The underdrain system (if applicable)	Clogging has occurred.	Wash out the underdrain system.
The drop inlet	Clogging has occurred.	Clean out the drop inlet. Dispose of the sediment off-site.
	The drop inlet is damaged	Repair or replace the drop inlet.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the NC Division of Water Quality 401 Oversight Unit at 919-733-1786.

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing bioretention maintenance requirements. Witness my hand and official seal,

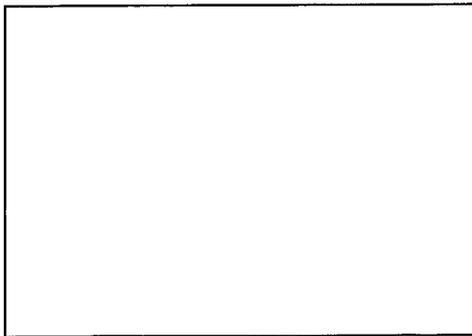

SEAL

My commission expires _____

Permit Number: _____
 (to be provided by DWQ)
 Drainage Area Number: _____

Dry Extended Detention Basin Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

The dry extended detention basin system is defined as the dry detention basin, outlet structure, pretreatment including forebays and the vegetated filter if one is provided.

This system (check one):

does does not incorporate a vegetated filter at the outlet.

This system (check one):

does does not incorporate pretreatment other than a forebay.

Important maintenance procedures:

- The drainage area will be managed to reduce the sediment load to the dry extended detention basin.
- Immediately after the dry extended detention basin is established, the vegetation will be watered twice weekly if needed until the plants become established (commonly six weeks).
- No portion of the dry extended detention pond will be fertilized after the first initial fertilization that is required to establish the vegetation.
- I will maintain the vegetation in and around the basin at a height of approximately six inches.
- Once a year, a dam safety expert will inspect the embankment.

After the dry extended detention basin is established, it will be inspected **once a quarter and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How I will remediate the problem:
The entire BMP	Trash/debris is present.	Remove the trash/debris.
The perimeter of the dry extended detention basin	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.

BMP element:	Potential problem:	How I will remediate the problem:
The inlet device: pipe or swale	The pipe is clogged (if applicable).	Unclog the pipe. Dispose of the sediment off-site.
	The pipe is cracked or otherwise damaged (if applicable).	Replace the pipe.
	Erosion is occurring in the swale (if applicable).	Regrade the swale if necessary to smooth it over and provide erosion control devices such as reinforced turf matting or riprap to avoid future problems with erosion.
The forebay	Sediment has accumulated and reduced the depth to 75% of the original design depth (see diagram below).	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Erosion has occurred or riprap is displaced.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	Weeds are present.	Remove the weeds, preferably by hand. If pesticides are used, wipe them on the plants rather than spraying.
The main treatment area	Sediment has accumulated and reduced the depth to 75% of the original design depth (see diagram below).	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP. Revegetate disturbed areas immediately with sod (preferred) or seed protected with securely staked erosion mat.
	Water is standing more than 5 days after a storm event.	Check outlet structure for clogging. If it is a design issue, consult an appropriate professional.
	Weeds and noxious plants are growing in the main treatment area.	Remove the plants by hand or by wiping them with pesticide (do not spray).

BMP element:	Potential problem:	How I will remediate the problem:
The embankment	Shrubs or trees have started to grow on the embankment.	Remove shrubs or trees immediately.
	Grass cover is unhealthy or eroding.	Restore the health of the grass cover - consult a professional if necessary.
	Signs of seepage on the downstream face.	Consult a professional.
	Evidence of muskrat or beaver activity is present.	Use traps to remove muskrats and consult a professional to remove beavers.
	An annual inspection by an appropriate professional shows that the embankment needs repair.	Make all needed repairs.
The outlet device	Clogging has occurred.	Clean out the outlet device. Dispose of the sediment off-site.
	The outlet device is damaged	Repair or replace the outlet device.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the NC Division of Water Quality 401 Oversight Unit at 919-733-1786.


The measuring device used to determine the sediment elevation shall be such that it will give an accurate depth reading and not readily penetrate into accumulated sediments.

When the basin depth reads _____ feet in the main pond, the sediment shall be removed.

When the basin depth reads _____ feet in the forebay, the sediment shall be removed.

BASIN DIAGRAM

(fill in the blanks)

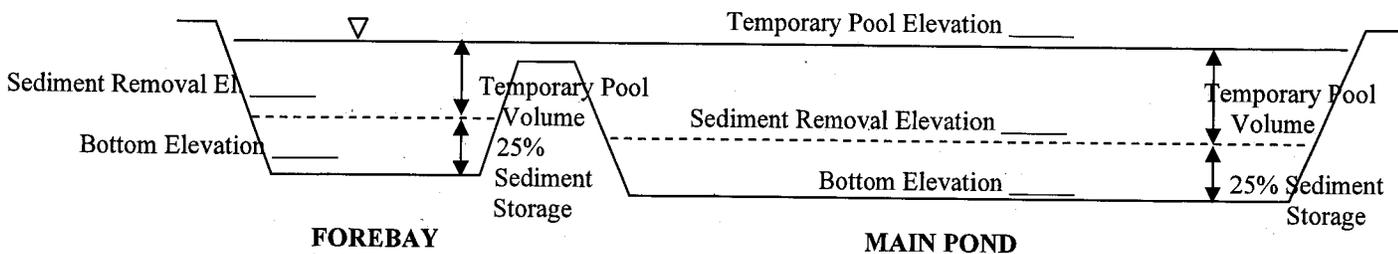

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing dry detention basin maintenance requirements. Witness my hand and official seal,

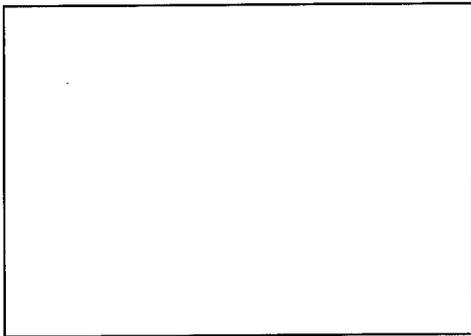

SEAL

My commission expires _____

Permit Number: _____
(to be provided by DWQ)

Drainage Area Number: _____

Filter Strip, Restored Riparian Buffer and Level Spreader Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

Important maintenance procedures:

- Immediately after the filter strip is established, any newly planted vegetation will be watered twice weekly if needed until the plants become established (commonly six weeks).
- Once a year, the filter strip will be reseeded to maintain a dense growth of vegetation
- Stable groundcover will be maintained in the drainage area to reduce the sediment load to the vegetation.
- Two to three times a year, grass filter strips will be mowed and the clippings harvested to promote the growth of thick vegetation with optimum pollutant removal efficiency. Turf grass should not be cut shorter than 3 to 5 inches and may be allowed to grow as tall as 12 inches depending on aesthetic requirements (NIPC, 1993). Forested filter strips do not require this type of maintenance.
- Once a year, the soil will be aerated if necessary.
- Once a year, soil pH will be tested and lime will be added if necessary.

After the filter strip is established, it will be inspected **quarterly and within 24 hours after every storm event greater than 1.0 inch (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How I will remediate the problem:
The entire filter strip system	Trash/debris is present.	Remove the trash/debris.
The flow splitter device (if applicable)	The flow splitter device is clogged.	Unclog the conveyance and dispose of any sediment off-site.
	The flow splitter device is damaged.	Make any necessary repairs or replace if damage is too large for repair.

BMP element:	Potential problem:	How I will remediate the problem:
The swale and the level lip	The swale is clogged with sediment.	Remove the sediment and dispose of it off-site.
	The level lip is cracked, settled, undercut, eroded or otherwise damaged.	Repair or replace lip.
	There is erosion around the end of the level spreader that shows stormwater has bypassed it.	Regrade the soil to create a berm that is higher than the level lip, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Trees or shrubs have begun to grow on the swale or just downslope of the level lip.	Remove them.
The bypass channel	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then reestablish proper erosion control.
	Turf reinforcement is damaged or ripap is rolling downhill.	Study the site to see if a larger bypass channel is needed (enlarge if necessary). After this, reestablish the erosion control material.
The filter strip	Grass is too short or too long (if applicable).	Maintain grass at a height of approximately three to six inches.
	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Sediment is building up on the filter strip.	Remove the sediment and restabilize the soil with vegetation if necessary. Provide lime and a one-time fertilizer application.
	Plants are desiccated.	Provide additional irrigation and fertilizer as needed.
	Plants are dead, diseased or dying.	Determine the source of the problem: soils, hydrology, disease, etc. Remedy the problem and replace plants. Provide a one-time fertilizer application.
	Nuisance vegetation is choking out desirable species.	Remove vegetation by hand if possible. If pesticide is used, do not allow it to get into the receiving water.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the NC Division of Water Quality local Regional Office, or the 401 Oversight Unit at 919-733-1786.

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____

Phone: _____


Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing filter strip, riparian buffer, and/or level spreader maintenance requirements.

Witness my hand and official seal,

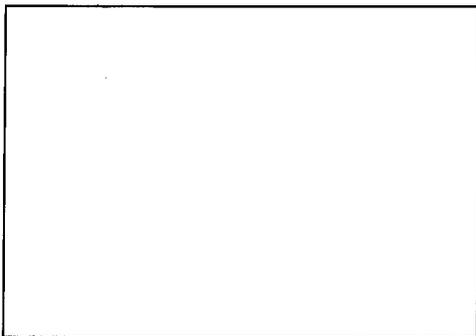

SEAL

My commission expires _____

Permeable Pavement Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

Important operation and maintenance procedures:

- Stable groundcover will be maintained in the drainage area to reduce the sediment load to the permeable pavement.
- The area around the perimeter of the permeable pavement will be stabilized and mowed, with clippings removed.
- Any weeds that grow in the permeable pavement will be sprayed with pesticide immediately. Weeds will not be pulled, since this could damage the fill media.
- Once a year, the permeable pavement surface will be vacuum swept.
- At no time shall wet sweeping (moistening followed by sweeping) be allowed as a means of maintenance.
- There shall be no repair or treatment of Permeable Pavement surfaces with other types of pavement surfaces. All repairs to Permeable Pavement surfaces must be accomplished utilizing permeable pavement which meets the original pavement specifications.
- Concentrated runoff from roof drains, piping, swales or other point sources, directly onto the permeable pavement surface shall not be allowed. These areas must be diverted away from the permeable pavement.

Initial Inspection: Permeable Pavements shall be inspected monthly for the first three months for the following:

BMP element:	Potential problem:	How to remediate the problem:
The perimeter of the permeable pavement	Areas of bare soil and/or erosive gullies have formed.	In the event that rutting or failure of the groundcover occurs, the eroded area shall be repaired immediately and permanent groundcover re-established. Appropriate temporary Erosion Control measures (such as silt fence) shall be installed in the affected area during the establishment of permanent groundcover, and any impacted area of permeable pavement is to be cleaned via vacuum sweeping.
The surface of the permeable pavement	Rutting / uneven settlement	This indicates inadequate compaction of the pavement base / sub-base. If rutting or uneven settlement on the order of ½ inch or greater occurs, permeable pavement shall be removed and base / sub-base re-compacted, smoothed, and permeable pavement shall then be re-installed. Base and sub-base compaction shall be monitored by a licensed geotechnical engineer to ensure that infiltration capacity of base and sub-base are not compromised by compaction and smoothing processes.
	The pavement does not dewater between storms, or water is running off.	Vacuum sweep the pavement. If the pavement still does not dewater, consult a professional.

Permit Number: _____
 (to be provided by DWQ)
 Drainage Area / Lot Number: _____

The permeable pavement will be inspected **once a quarter and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**.
 Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How to remediate the problem:
The perimeter of the permeable pavement	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Vegetation is too short or too long.	Maintain vegetation at a height of 3 to 6 inches (remove clippings).
The surface of the permeable pavement	Trash/debris is present.	Remove the trash/debris.
	Weeds are growing on the surface of the permeable pavement.	Do not pull the weeds (may pull out media as well). Spray them with pesticide.
	Sediment is present on the surface.	Vacuum sweep the pavement.
	The structure is deteriorating or damaged.	Consult an appropriate professional. Damaged areas of the pavement shall be removed and repaired.
	The pavement does not dewater between storms.	Vacuum sweep the pavement. If the pavement still does not dewater, consult a professional. Permanently clogged pavement shall be removed and repaired.

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area or lot number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing permeable pavement maintenance requirements. Witness my hand and official seal,

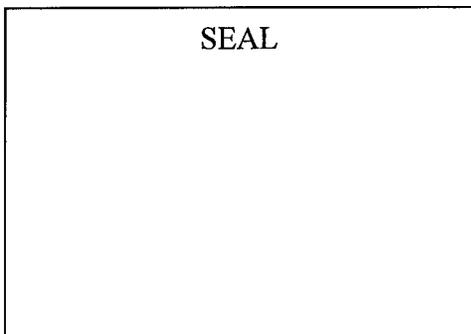

My commission expires _____

Permit Number: _____
 (to be provided by DWQ)

Drainage Area Number: _____

Sand Filter Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

Important maintenance procedures:

- The drainage area will be carefully managed to reduce the sediment load to the sand filter.
- Once a year, sand media will be skimmed.
- The sand filter media will be replaced whenever it fails to function properly after vacuuming.

The sand filter will be inspected **quarterly and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How I will remediate the problem:
The entire BMP	Trash/debris is present.	Remove the trash/debris.
The adjacent pavement (if applicable)	Sediment is present on the pavement surface.	Sweep or vacuum the sediment as soon as possible.
The perimeter of the sand filter	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Vegetation is too short or too long.	Maintain vegetation at a height of approximately six inches.
The flow diversion structure	The structure is clogged.	Unclog the conveyance and dispose of any sediment off-site.
	The structure is damaged.	Make any necessary repairs or replace if damage is too large for repair.
The pretreatment area	Sediment has accumulated to a depth of greater than six inches.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Erosion has occurred.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	Weeds are present.	Remove the weeds, preferably by hand. If a pesticide is used, wipe it on the plants rather than spraying.

BMP element:	Potential problem:	How I will remediate the problem:
The filter bed and underdrain collection system	Water is ponding on the surface for more than 24 hours after a storm.	Check to see if the collector system is clogged and flush if necessary. If water still ponds, remove the top few inches of filter bed media and replace. If water still ponds, then consult an expert.
The outflow spillway and pipe	Shrubs or trees have started to grow on the embankment.	Remove shrubs and trees immediately.
	The outflow pipe is clogged.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	The outflow pipe is damaged.	Repair or replace the pipe.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the NC Division of Water Quality 401 Oversight Unit at 919-733-1786.

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing sand filter maintenance requirements. Witness my hand and official seal,

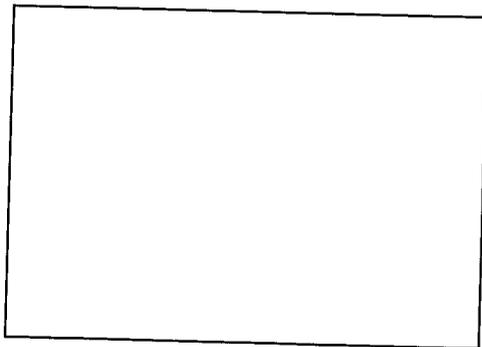

SEAL

My commission expires _____

Permit Number: _____
(to be provided by DWQ)

Drainage Area Number: _____

Stormwater Wetland Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

Important maintenance procedures:

- Immediately after the stormwater wetland is established, the wetland plants will be watered twice weekly if needed until the plants become established (commonly six weeks).
- No portion of the stormwater wetland will be fertilized after the first initial fertilization that is required to establish the wetland plants.
- Stable groundcover will be maintained in the drainage area to reduce the sediment load to the wet detention basin.
- Once a year, a dam safety expert will inspect the embankment.

After the wet detention pond is established, I will inspect it **once a month and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance will be kept in a known set location and will be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How I will remediate the problem:
The entire BMP	Trash/debris is present.	Remove the trash/ debris.
The perimeter of the wetland	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Vegetation is too short or too long.	Maintain vegetation at a height of approximately six inches.
The inlet device: pipe or swale	The pipe is clogged (if applicable).	Unclog the pipe. Dispose of the sediment off-site.
	The pipe is cracked or otherwise damaged (if applicable).	Replace the pipe.
	Erosion is occurring in the swale (if applicable).	Regrade the swale if necessary to smooth it over and provide erosion control devices such as reinforced turf matting or riprap to avoid future problems with erosion.

BMP element:	Potential problem:	How I will remediate the problem:
The forebay	Sediment has accumulated in the forebay to a depth that inhibits the forebay from functioning well.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Erosion has occurred.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	Weeds are present.	Remove the weeds, preferably by hand. If a pesticide is used, wipe it on the plants rather than spraying.
The deep pool, shallow water and shallow land areas	Algal growth covers over 50% of the deep pool and shallow water areas.	Consult a professional to remove and control the algal growth.
	Cattails, phragmites or other invasive plants cover 50% of the deep pool and shallow water areas.	Remove the plants by wiping them with pesticide (do not spray) - consult a professional.
	Shallow land remains flooded more than 5 days after a storm event.	Unclog the outlet device immediately.
	Plants are dead, diseased or dying.	Determine the source of the problem: soils, hydrology, disease, etc. Remedy the problem and replace plants. Provide a one-time fertilizer application to establish the ground cover if a soil test indicates it is necessary.
	Best professional practices show that pruning is needed to maintain optimal plant health.	Prune according to best professional practices.
	Sediment has accumulated and reduced the depth to 75% of the original design depth of the deep pools.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.

BMP element:	Potential problem:	How I will remediate the problem:
The embankment	A tree has started to grow on the embankment.	Consult a dam safety specialist to remove the tree.
	An annual inspection by an appropriate professional shows that the embankment needs repair.	Make all needed repairs.
	Evidence of muskrat or beaver activity is present.	Use traps to remove muskrats and consult a professional to remove beavers.
The micropool	Sediment has accumulated and reduced the depth to 75% of the original design depth.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Plants are growing in the micropool.	Remove the plants, preferably by hand. If a pesticide is used, wipe it on the plants rather than spraying.
The outlet device	Clogging has occurred.	Clean out the outlet device. Dispose of the sediment off-site.
	The outlet device is damaged	Repair or replace the outlet device.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the NC Division of Water Quality 401 Oversight Unit at 919-733-1786.

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing stormwater wetland maintenance requirements. Witness my hand and official seal,

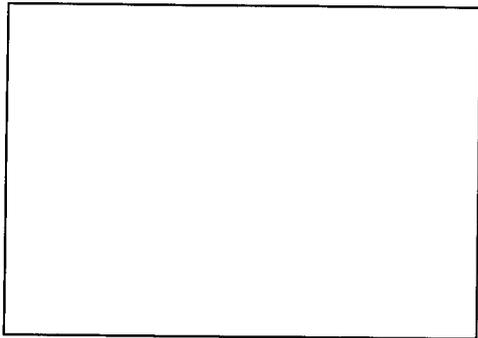

SEAL

My commission expires _____

Permit Number: _____
(to be provided by DWQ)

Drainage Area Number: _____

Wet Detention Basin Operation and Maintenance Agreement

I will keep a maintenance record on this BMP. This maintenance record will be kept in a log in a known set location. Any deficient BMP elements noted in the inspection will be corrected, repaired or replaced immediately. These deficiencies can affect the integrity of structures, safety of the public, and the removal efficiency of the BMP.

The wet detention basin system is defined as the wet detention basin, pretreatment including forebays and the vegetated filter if one is provided.

This system (check one):

does does not incorporate a vegetated filter at the outlet.

This system (check one):

does does not incorporate pretreatment other than a forebay.

Important maintenance procedures:

- Immediately after the wet detention basin is established, the plants on the vegetated shelf and perimeter of the basin should be watered twice weekly if needed, until the plants become established (commonly six weeks).
- No portion of the wet detention pond should be fertilized after the first initial fertilization that is required to establish the plants on the vegetated shelf.
- Stable groundcover should be maintained in the drainage area to reduce the sediment load to the wet detention basin.
- If the basin must be drained for an emergency or to perform maintenance, the flushing of sediment through the emergency drain should be minimized to the maximum extent practical.
- Once a year, a dam safety expert should inspect the embankment.

After the wet detention pond is established, it should be inspected **once a month and within 24 hours after every storm event greater than 1.0 inches (or 1.5 inches if in a Coastal County)**. Records of operation and maintenance should be kept in a known set location and must be available upon request.

Inspection activities shall be performed as follows. Any problems that are found shall be repaired immediately.

BMP element:	Potential problem:	How I will remediate the problem:
The entire BMP	Trash/debris is present.	Remove the trash/debris.
The perimeter of the wet detention basin	Areas of bare soil and/or erosive gullies have formed.	Regrade the soil if necessary to remove the gully, and then plant a ground cover and water until it is established. Provide lime and a one-time fertilizer application.
	Vegetation is too short or too long.	Maintain vegetation at a height of approximately six inches.

Permit Number: _____
 (to be provided by DWQ)

Drainage Area Number: _____

BMP element:	Potential problem:	How I will remediate the problem:
The inlet device: pipe or swale	The pipe is clogged.	Unclog the pipe. Dispose of the sediment off-site.
	The pipe is cracked or otherwise damaged.	Replace the pipe.
	Erosion is occurring in the swale.	Regrade the swale if necessary to smooth it over and provide erosion control devices such as reinforced turf matting or riprap to avoid future problems with erosion.
The forebay	Sediment has accumulated to a depth greater than the original design depth for sediment storage.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Erosion has occurred.	Provide additional erosion protection such as reinforced turf matting or riprap if needed to prevent future erosion problems.
	Weeds are present.	Remove the weeds, preferably by hand. If pesticide is used, wipe it on the plants rather than spraying.
The vegetated shelf	Best professional practices show that pruning is needed to maintain optimal plant health.	Prune according to best professional practices
	Plants are dead, diseased or dying.	Determine the source of the problem: soils, hydrology, disease, etc. Remedy the problem and replace plants. Provide a one-time fertilizer application to establish the ground cover if a soil test indicates it is necessary.
	Weeds are present.	Remove the weeds, preferably by hand. If pesticide is used, wipe it on the plants rather than spraying.
The main treatment area	Sediment has accumulated to a depth greater than the original design sediment storage depth.	Search for the source of the sediment and remedy the problem if possible. Remove the sediment and dispose of it in a location where it will not cause impacts to streams or the BMP.
	Algal growth covers over 50% of the area.	Consult a professional to remove and control the algal growth.
	Cattails, phragmites or other invasive plants cover 50% of the basin surface.	Remove the plants by wiping them with pesticide (do not spray).

Permit Number: _____
(to be provided by DWQ)

Drainage Area Number: _____

BMP element:	Potential problem:	How I will remediate the problem:
The embankment	Shrubs have started to grow on the embankment.	Remove shrubs immediately.
	Evidence of muskrat or beaver activity is present.	Use traps to remove muskrats and consult a professional to remove beavers.
	A tree has started to grow on the embankment.	Consult a dam safety specialist to remove the tree.
	An annual inspection by an appropriate professional shows that the embankment needs repair.	Make all needed repairs.
The outlet device	Clogging has occurred.	Clean out the outlet device. Dispose of the sediment off-site.
	The outlet device is damaged	Repair or replace the outlet device.
The receiving water	Erosion or other signs of damage have occurred at the outlet.	Contact the local NC Division of Water Quality Regional Office, or the 401 Oversight Unit at 919-733-1786.


The measuring device used to determine the sediment elevation shall be such that it will give an accurate depth reading and not readily penetrate into accumulated sediments.

When the permanent pool depth reads _____ feet in the main pond, the sediment shall be removed.

When the permanent pool depth reads _____ feet in the forebay, the sediment shall be removed.

BASIN DIAGRAM

(fill in the blanks)

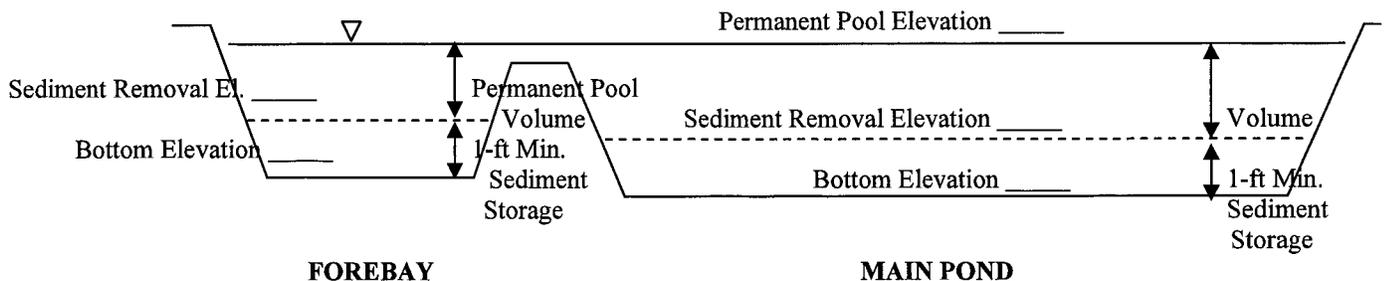

Permit Number: _____
(to be provided by DWQ)

I acknowledge and agree by my signature below that I am responsible for the performance of the maintenance procedures listed above. I agree to notify DWQ of any problems with the system or prior to any changes to the system or responsible party.

Project name: _____

BMP drainage area number: _____

Print name: _____

Title: _____

Address: _____


Phone: _____

Signature: _____

Date: _____

Note: The legally responsible party should not be a homeowners association unless more than 50% of the lots have been sold and a resident of the subdivision has been named the president.

I, _____, a Notary Public for the State of _____, County of _____, do hereby certify that _____ personally appeared before me this _____ day of _____, _____, and acknowledge the due execution of the forgoing wet detention basin maintenance requirements. Witness my hand and official seal,

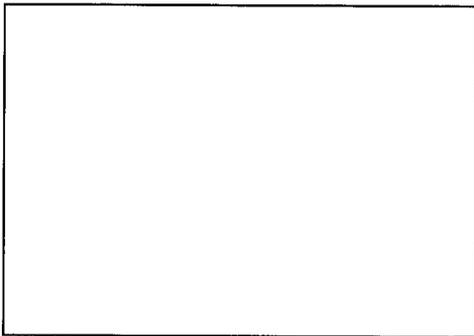

SEAL

My commission expires _____

